


# dform | flame pendant

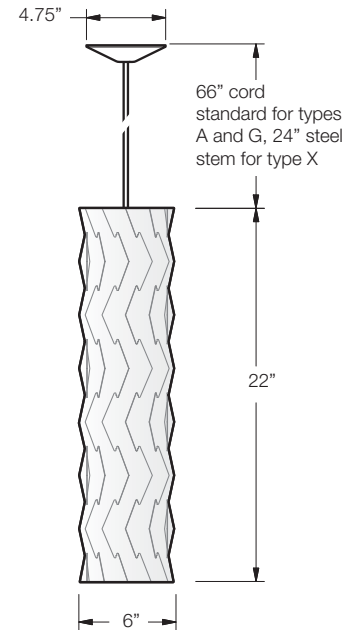

model	shade material	lampholder type	voltage	suspension	metal finish	drop distance
<b>PF12</b>						

<b>size</b> 6" W x 22" H	<b>standard</b> A =  aspen B =  birch	A = (1) 60w incandescent A19 or T also compatible with fluorescent screw base lamps are not included	120	C = white cord w/ canopy	M4=  white	overall drop from ceiling to bottom of fixture in inches. Standard suspension cord length is 66" (adjustable). Please specify for longer cord.
<b>weight</b> 1 lb						
<b>certification</b> 	<b>custom</b> P =  white poly additional charges apply to custom options	G = (1) 26w fluorescent GU24 twist lock X = (1) 24w fluorescent 4-pin 2G11	277- lamp type X only	K = black cord w/ silver canopy T = steel tube stem w/ canopy	M1=  silver M2=  light bronze M3=  dark bronze	optional steel suspension rods are 24" long and \$17 ea. Any cut length is available. Rods link end to end for longer lengths.

	material details	suspension options	mounting details
project:	<p><b>shade</b></p> <p>the standard shade material is 2-ply wood veneer with a poly core lamination and surface coating. The material is cleanable with soap water and cloth or household spray cleaners.</p> <p>the custom white poly material can also be made in other colors.</p> <p><b>hardware</b></p> <p>all hardware is steel or aluminum with a powder coat finish.</p>	standard white canopy with white cord optional silver canopy with steel stem silver canopy for fluorescent ballast with steel stem	<p>octagonal junction box, 3.5" hole spacing</p> <p>strain relief knot</p> <p>crossbar with ground screw</p> <p>canopy</p> <p>cord</p>
type:			
quantity:			
notes:			